Tenda




OAP1200

802.11AC Indoor/Outdoor Wi-Fi Access Point

www.tendacn.com

Link More

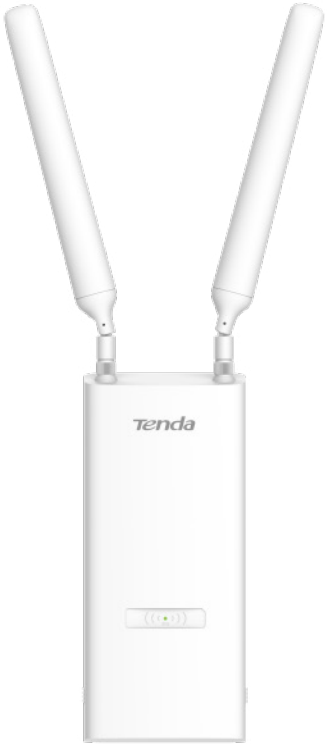

OAP1200

802.11AC Indoor/Outdoor Wi-Fi Access Point

Product Description

The gigabit dual-band indoor/outdoor access point OAP1200 offers a concurrent data rate as high as 1167 Mbps. Equipped with 2omni-directional high-gain antennas,OAP1200 provides a maximum coverage radius of 200 meters. OAP1200 can be installed either on the wall or around a pole. OAP1200 can meet different requirements by connecting antennas of different specifications to the standard RP-SMA connectors. With the IP65 enclosure, OAP1200 is designed for wireless coverage in factories, warehouses and other harsh outdoor environments.

Key Features

- Durable IP65 enclosure for outdoor Wi-Fi applications.
- MU-MIMO technology for high throughput.
- Concurrent dual-band data rate up to 1167 Mbps (2.4 GHz: 300 Mbps; 5.7 GHz: 867 Mbps).
- Detachable antennas and 2 RP-SMA connectors.
- Coverage radius of 200 meters.

Product Features



IP65 protection

Professional materials and design guarantee OAP1200 an IP65 enclosure for harsh environments both indoors and outdoors.



IEEE 802.11ac Wave2 and MU-MIMO

Powered by MU-MIMO technology, a single OAP1200 can communicate with multiple wireless clients at the same time, letting you enjoy higher throughput and better experience.



Dual-band for more connected clients

OAP1200 allows clients that support either 2.4 GHz or 5.7 GHz band, or both to connect to it at the same time, tripling the quantity of connected clients of traditional single-band AP.

Product Features

High-gain omni-directional antennas

Equipped with two 5 dBi high-gain omni-directional antennas, OAP1200 provides a maximum coverage radius of 200 meters. OAP1200 can meet different require-ments by connecting antennas of different specifications to the standard RP-SMA connectors.

Built-in RF for intelligent optimization

Featuring various anti-interference algorithms, the built-in RF enables OAP1200 to evenly allocate bandwidth resources for multiple users, filter interference, and optimize data rate, offering you a guaranteed signal strength and reliable wireless experience.


VLAN tagging for SSID

OAP1200 allows you to set multiple SSIDs and add VLAN tags for SSIDs, thus protecting your network.

Standard PoE sourcing and DC power supply for easy deployment

You can use an IEEE 802.3at-compliant PoE sourcing equipment, or a 24V DC power adapter to power on OAP1200.

Application Scenarios

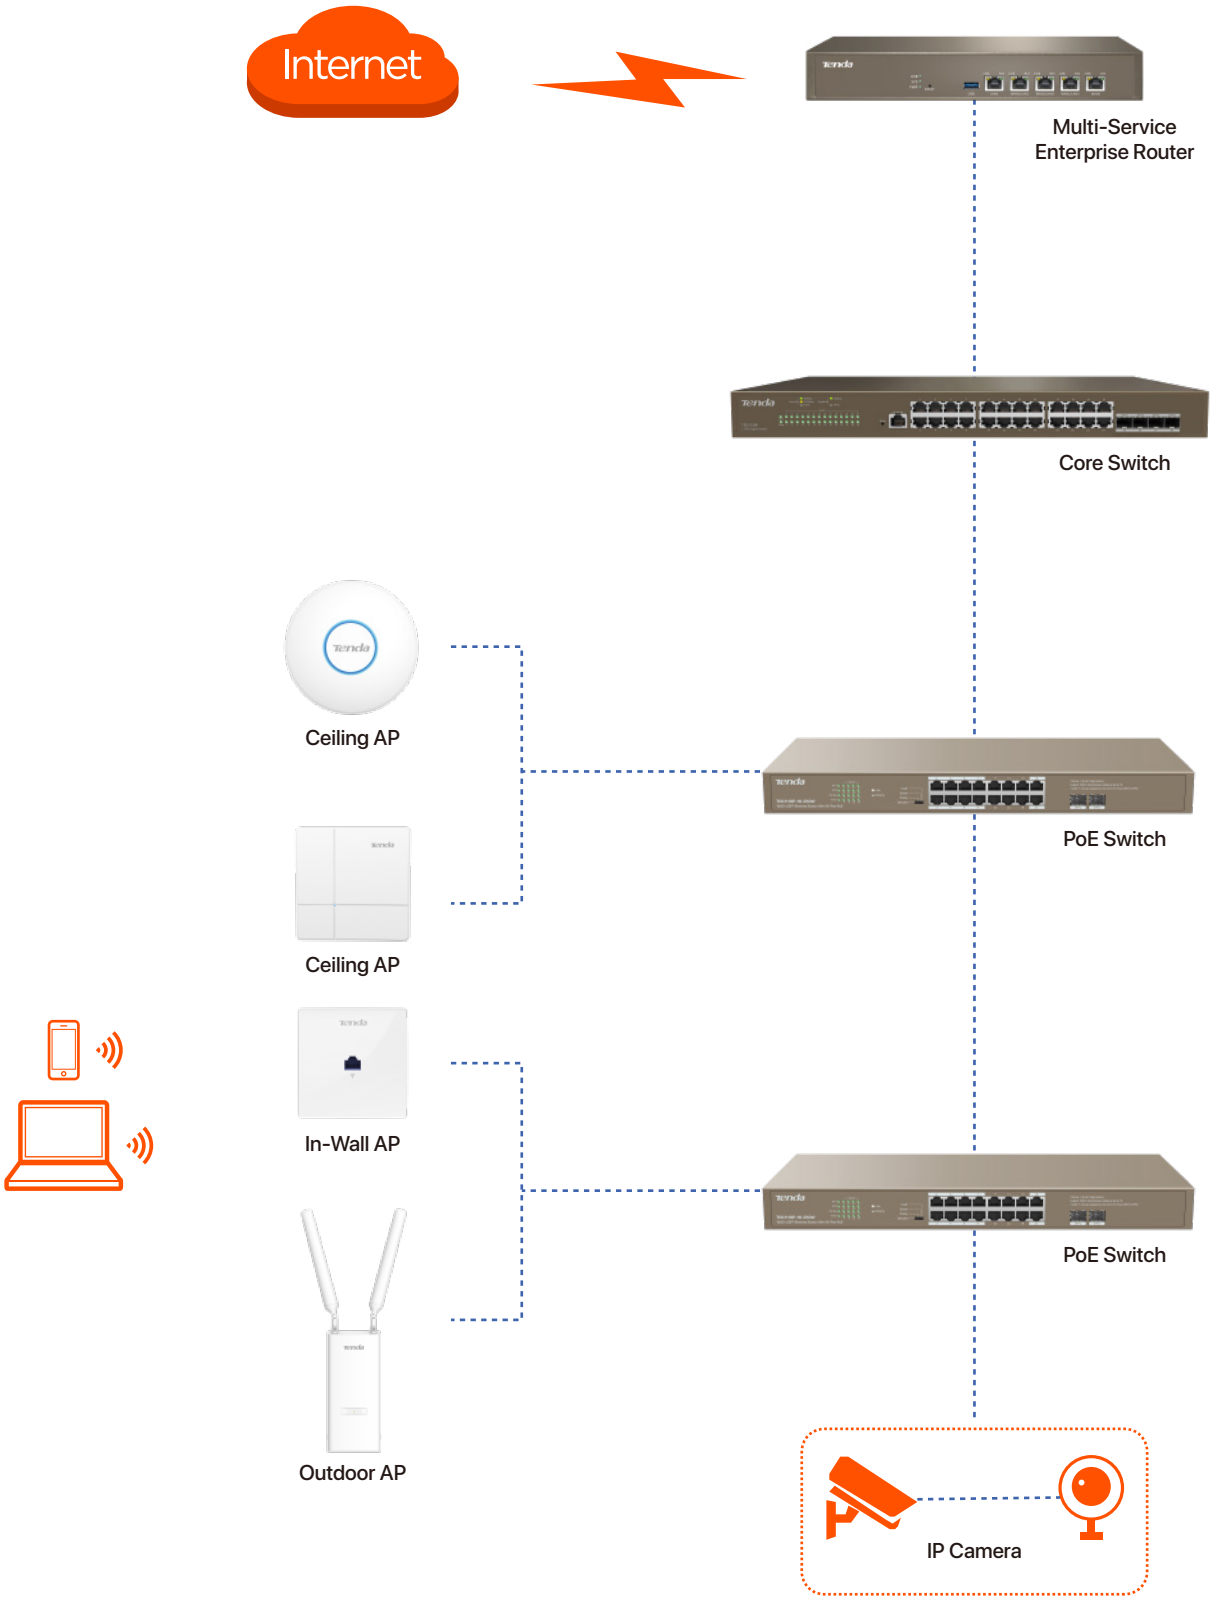

Technical Specifications

Product Information	
Model	OAP1200
Appearance	Pole Mounting and Wall Mounting
Dimensions	194.7* 83* 42.1 mm
Hardware Specifications	
Frequency band	2.4 GHz, 5.7 GHz
Wireless standards	IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11ac
2.4 GHz data rate	1 - 300 Mbps
5.7 GHz data rate	6 - 867 Mbps
Ethernet port	1*10/100/1000 Base-TX port
Button	1*Reset
LED indicator	1*SYSt
Waterproof level	IP65
Lightning protection	6000 V
Max. power consumption	11.5 W (Full-load)
Power supply standard	IEEE 802.3af/at & 24V, 0.5A Passive PoE
Antenna	2*5dBi, RP-SMA Connector
2.4 GHz Transmission Power	26 +/- 1.5 dBm
5.7 GHz Transmission Power	26 +/- 1.5 dBm
802.11b RX sensitivity	-93 dBm
2.4 GHz 802.11n (MCS7) RX sensitivity	-72 dBm
5.7 GHz 802.11a RX sensitivity	-93 dBm
5.7 GHz 802.11n (MCS7) RX sensitivity	-74 dBm

Software Specifications

Operating modes	AP, Client+AP
Hide SSID	Supported
Max. No. of SSID	2.4 GHz: 8, 5.7 GHz: 4
Max. connected clients	2.4 GHz: 128, 5.7 GHz: 256
WEP	Supported
WPA-PSK	AES/TKIP
WPA2-PSK	AES/TKIP
WPA	Supported
WPA2	Supported
Access control	MAC address-based
Adjustable power transmit	Supported
Frequency analysis	Supported
AP isolation	Supported
Connected client control	Supported
RSSI threshold	Supported
WMM	Supported
VLAN tagging for SSID	Supported
Management	Web UI
LED indicator control	Supported
Diagnostics tool	Ping, Traceroute
Scheduled reboot	Supported
Reboot at specified interval	Supported

Software Specifications

System logs	Supported
Firmware upgrade	Local and AC upgrade
Reboot	Local and AC reboot
Reset	Local and AC reset
Backup configuration	Supported
Restore configuration	Supported

Operating Environment

Default login IP address	192.168.0.254
Default user name	admin
Default password	admin
Operating temperature	*-30℃ - 50℃*
Operating humidity	(10% - 90%) RH, non-condensing
Storage temperature	*-30℃ - 70℃*
Storage humidity	(10% - 90%) RH, non-condensing

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' l E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn
Tel:+86-755-2765 7098
Fax:+86-755-2765 7178
PC:518055

Like us on Facebook

Follow us on Twitter

Specifications are subject to change without notice.Copyright ©2023SHENZHEN TENDA TECHNOLOGY CO.,LTD. All rights reserved. Tenda is the trademark of SHENZHEN TENDA TECHNOLOGY CO.,LTD. All other brand names mentioned herein are the trademark or registered trademarks of their respective holders.