

Tenda



IT6-LRS

3MP Bullet Security Camera



IT6-LRS


3MP Bullet Security Camera

滚滚长江东逝水

Product Description


3MP Bullet Security Camera IT6-LRS is a high-performance 3MP (2304x1296) engineering camera that integrates such functions as infrared night vision, motion detection and remote audio pickup. It is commonly used in indoor monitoring scenarios, such as factories, courtyards, shops, buildings, and some SMB projects, where contractors can use their mobile phones for remote real-time monitoring.

Selling Points

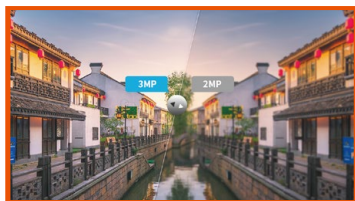


Clear monitoring details from 3MP HD images

Equipped with a high-performance image sensor, the camera can display 3MP HD images (2304*1296) with more monitoring details.

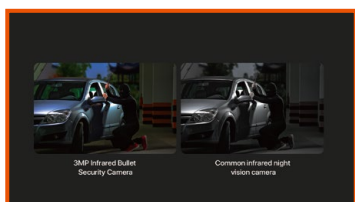

Starlight night vision with good low-light performance at the price of infrared night vision

With starlight night vision offered by the wide-aperture lens and highly sensitive sensor, the camera is more light-sensitive than common cameras and can display finer images than common infrared cameras.

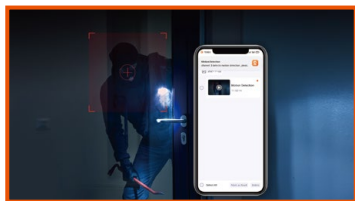

Remote control for light of heart

The camera supports remote control on the app to view real-time monitoring. Once the device detects an abnormal event, it can push the alarm notification remotely.



IP67 waterproof and dustproof

With IP67 waterproof and dustproof design, the camera can withstand rainy, sunny, stormy, and even snowy weathers.



H.265 coding technology for smooth video and efficient data storage

Compared with H.264, the new-generation H.265 saves 50% in video data size, which further smoothes the videos with bandwidth saved and saves the data storage space.

Selling Points




Audio pickup over 5 m, sync audio and video

With an inbuilt highly sensitive microphone which supports remote audio pickup over 5 m, the camera can sync audio and video.




Four infrared lights, clear even at night

Equipped with four high-power infrared lights, the dynamic images can be easily captured under night vision environment over 50 m.

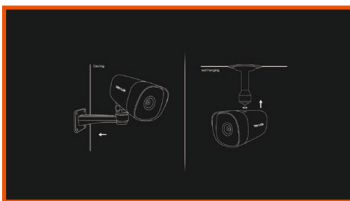

Wall-mounting/Ceiling-mounting

The camera can be either wall-mounted or ceiling-mounted, quite flexible and convenient.

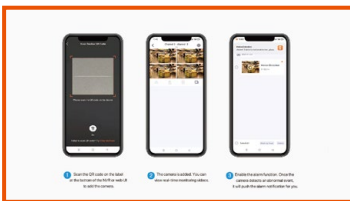

Remote control for light of heart

The camera supports remote control on the app to view real-time monitoring. Once the device detects an abnormal event, it can push the alarm notification remotely.

Specification

Hardware Specifications	
Ports	Power: DC 12V 1A Ethernet: 1*RJ45 100M Ethernet port on tail line
Lens	4mm@F2.2
Product Size	85×85×166mm
Video Specifications	
Resolution	2304*1296
Coding Standard	H.265/H.264
Day and Night Shift Mode	Built-in IR-CUT double filter
Noise Reduction	3D digital noise reduction
DWDR	Support
Backlight Compensation	Support
ROI	Support
Others	
Smart Alarm	Motion detection&Human detection&Customized area detection
Waterproof level	IP67
Audio	Built-in microphone
Network Protocol	RTSP、HTTP、DHCP、DDNS、ONVIF
Internet Protocol	IPV4
Device Connection Method	Wired
Infrared Night Vision Distance	50 Meters (Test data)
Temperature	Operating temperature: -20°C to 60°C Storage temperature: -40°C to 70°C
Humidity	Operating humidity: 10%-95%RH (non-condensing) Storage humidity: 3%-95%RH (non-condensing)
Certification	CE, RoHs, FCC
Package Contents	Security Camera, Waterproof kit,Quick installation guide, General public license notice

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int'l E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,She nzhen China.

E-mail:support@ tenda.com.cn

Tel:+86-755-2 765 7098

Fax:+86-755- 2765 7178

PC:518055

