


Tenda



TEG2210P-8-120W

9GE+1SFP Cloud Managed PoE Switch

Link
More

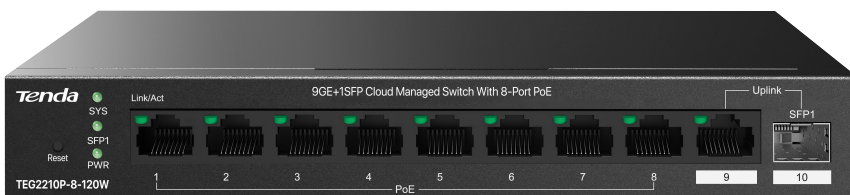

TEG2210P-8-120W

9GE+1SFP Cloud Managed PoE Switch

Products Descriptions

TEG2210P-8-120W is a 10-port PoE switch supporting Tenda CloudFi web and app management. Compatible with 802.3af/at standards, this switch provides up to 30W per port and up to 120W as a whole. It also supports detection of loops and limit unknown access, and 24/7 watchdog, making it an ideal choice for adding PD devices such as APs, cameras, and IP phones to your network and reducing time and costs on maintenance.

Features

- Comply with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3af, IEEE802.3at, IEEE802.3x, IEEE802.3z, IEEE802.1p, IEEE802.1q standards
- 9*10/100/1000 Base-T Ethernet ports, 1*1000 Base-X SFP optical ports
- 8 K MAC address table and MAC address auto learning
- 8*PoE ports, single port output power 30W, maximum output power 110W
- 20Gbps non-blocking wire-speed forwarding
- Web platform remote management, mobile APP management
- 4M large cache
- Support QVLAN, DHCP Snooping, anti-loop, PoE timing, watchdog, etc.

USPs



Cloud management platform

It supports Cloudfi Web platform and mobile APP management. You can scan the QR code in batches through the APP to add switches, automatically configure and go online. The cloud platform automatically generates a visual network topology, and you can check the operating status of the equipment anytime and anywhere.



PoE timing

Supports setting port PoE to turn on or off at fixed times to save energy during idle periods



Flexible installation


Supports desktop, wall-mounted, rack and other installation methods



Rich management features

Provides management functions such as QVLAN, VLAN transparent transmission, traffic statistics, port loop prevention, MAC address binding, etc., suitable for a variety of network scenarios

Relevant Info

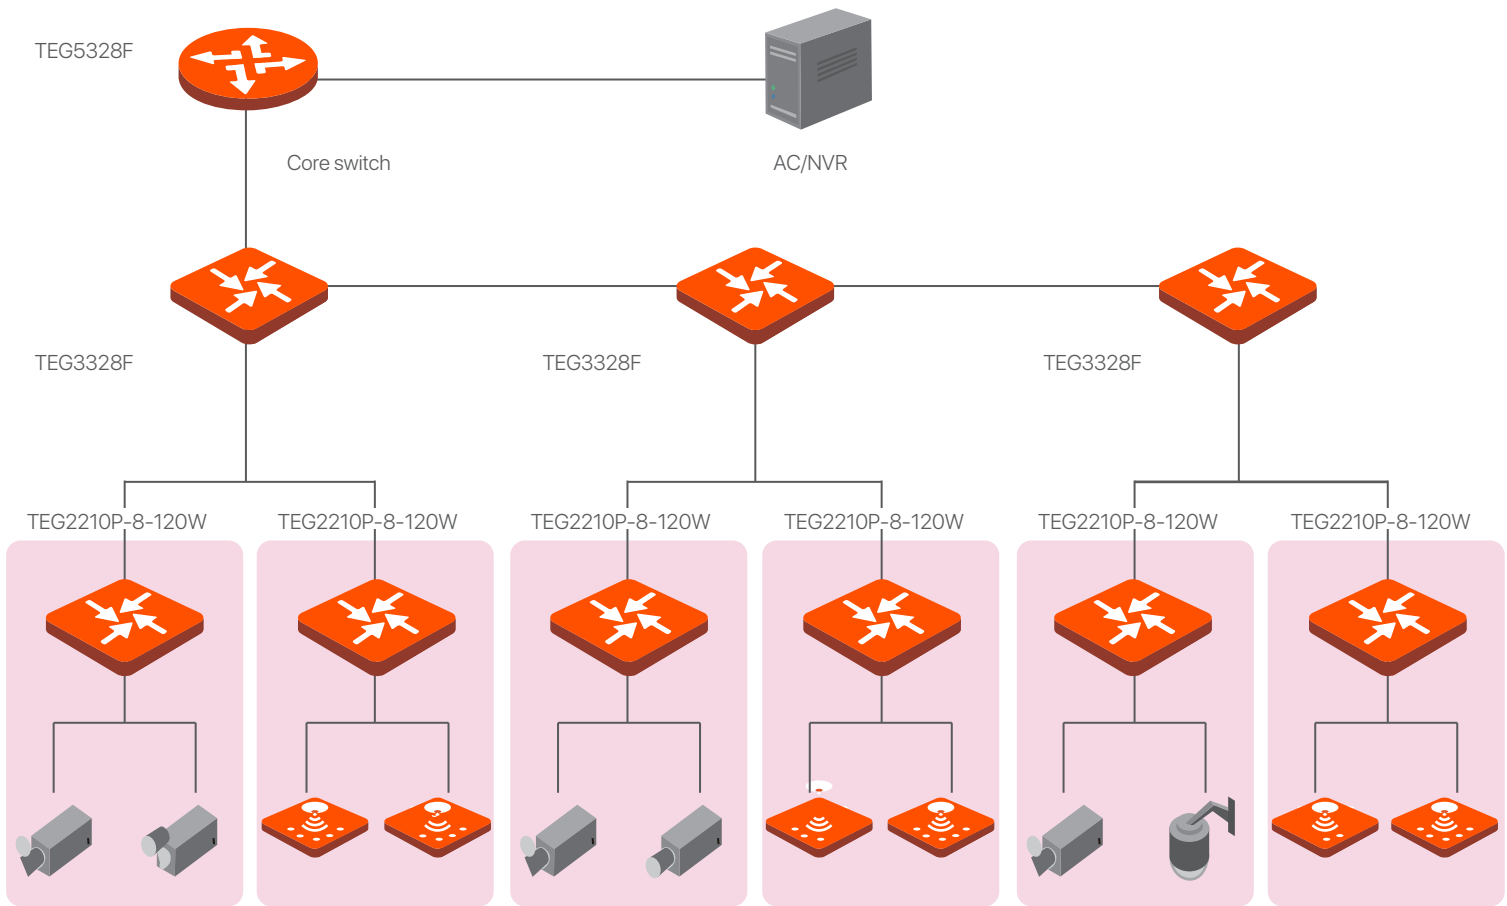

Product specifications

Product Model	TEG2210P-8-120W
Hardware specifications	
Network standards	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3af, IEEE802.3at, IEEE802.3x, IEEE802.3z, IEEE802.1p, IEEE802.1q
MTBF	≥50,000hours
LED indicators	One Link/Act LED indicator for each port One PWR LED indicator for each device One SYS LED indicator for each device One PoE-MAX LED indicator for each device
Ports	8*10/100/1000 Base-T Ethernet Ports (Data&power) 1*10/100/1000 Base-T Ethernet Ports (Data) 1*1000 Base-X SFP optical ports
Lightning Protection	≥6KV
Switching Mode	Store-and-forward
Switching Capacity	20Gbps
Forwarding Rate	14.9Mpps
MAC Address Table	8K
Input Voltage	AC: 100-240V 50/60Hz
PoE Power Supply	1-8 ports support 802.3af/at standard PoE power supply 1, 2 is +, 3, 6 is -
Dimensions (L × W × H)	177.5*104*26mm
Power Consumption	Total power consumption: <120W Total power budget: 110W
Environment	Operating temperature: 0°C - 40°C Storage temperature: -40°C - 70°C Operating humidity: (10% - 90%)RH, non-condensing Storage humidity: (5% - 90%)RH, non-condensing
Certification	CE、FCC、RoHS

Software specifications

VLAN	Support VLAN transparent transmission Support IEEE802.1Q VLAN
Port	Support port flow control Support port isolation Support port mirroring and aggregation Support port traffic statistics
Speed limit	Support port entrance and exit speed limit
Anti-ring	Support switch port loop protection
QoS	Support strict priority Supports weighted priority
MAC	Support MAC address table viewing MAC whitelist binding
Storm control	Support port storm control
Loading and Upgrading	Support HTTP upgrade Support configuration import and export
IGMP	Supports IGMP fast leave Supports IGMP Report Suppression
DHCP	Support DHCP Client Support DHCP Snooping
PoE	Support PoE power display Support PoE on and off Support PoE timing
watchdog	7*24 hours automatic operation and maintenance
Management and Maintenance	Support CloudFi App management Support CloudFi Cloud web UI management Support local web UI management Support ping test

Tenda Technology Bldg.Int' IE-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail: support@tenda.com.cn
Tel: +86-755-2765 7098
Fax: +86-755-2765 7178
PC: 518055

